

K tisku přijímáme tyto formáty:



- Tisková PDF musí být v barevném prostoru CMYK.
- Písma vložená, nebo v křivkách.
- Verze pdf nesmí být vyšší jak 1.3.
- PDF ukládáme do evropského standardu PDF/X-1a.
- Ořezové značky nesmí zasahovat do prostoru spadávky.
- Spadávku nastavíme minimálně na 3 mm.



- JPG musí být v barevném prostoru CMYK.
- Uložený bez komprese.
- Maximální délka strany nesmí přesahovat 21 500 px.
- Spadávku nastavíme minimálně na 3 mm.



- EPS musí být v barevném prostoru CMYK.
- Veškeré texty v křivkách.
- Ořezové značky nesmí zasahovat do prostoru spadávky.
- Spadávku nastavíme minimálně na 3 mm.



- TIF musí být v barevném prostoru CMYK.
- Uložený bez komprese (LZW komprese povolena).
- Maximální délka strany nesmí přesahovat 21 500 px.
- Spadávku nastavíme minimálně na 3 mm.

Nepoužívejte českou diakritiku v názvech souborů.
Nepoužívejte obrázky v barevném prostoru RGB.
Převeďte Pantone barvy do CMYK.



STÁHNOUT ŠABLONY
.ai, .idml, .indd, .pdf, .eps

85x200 cm

+ 1 cm nahoře pro zasunutí do lišty



85x200 cm

+ 10 cm dole pro zasunutí do mechanismu

100x200 cm

+ 1 cm nahoře pro zasunutí do lišty



100x200 cm

+ 10 cm dole pro zasunutí do mechanismu

120x200 cm

+ 1 cm nahoře pro zasunutí do lišty



120x200 cm

+ 10 cm dole pro zasunutí do mechanismu



Viditelná plocha rollupu.



Plocha bude schována v mechanismu a liště rollupu,
Je vhodné, aby na obou těchto plochách pokračovalo
pozadí rolety (grafického motivu).

Doporučené rozlišení v závislosti na vzdálenosti pozorovatele od rollupu je 300>150 ppi

For printing we accept these formats:



- Printing PDF must be in coloured scope CMYK.
- Scripts inserted or in curves.
- PDF version can not be higher than 1.3.
- We save PDF in european standard PDF/X-1a.
- Cropping marks can not step in space for bleeds.
- Bleed will be set up at least on 3 mm.



- JPG must be in coloured scope CMYK.
- Saved without compression.
- Maximum length of side can not exceed 21 500 pixels.
- Bleed will be set up at least on 3 mm.



- EPS must be in coloured scope CMYK.
- All texts in curves.
- Cropping marks can not step in space for bleeds.
- Bleed will be set up at least on 3 mm.



- TIF must be in coloured scope CMYK.
- Saved without compression (LZW compression is allowed).
- Maximum length of side can not exceed 21 500 pixels.
- Bleed will be set up at least on 3 mm.

Do not use Czech diacritics in file's names.
Do not use images in coloured scope RGB.
Convert Pantone colours into CMYK.



DOWNLOAD TEMPLATES

.ai, .idml, .indd, .pdf, .eps

85x200 cm

+1 cm on top for slide into the bar



85x200 cm

+10 cm on bottom for slide into the mechanism

100x200 cm

+1 cm on top for slide into the bar




100x200 cm

+10 cm on bottom for slide into the mechanism

120x200 cm

+1 cm on top for slide into the bar

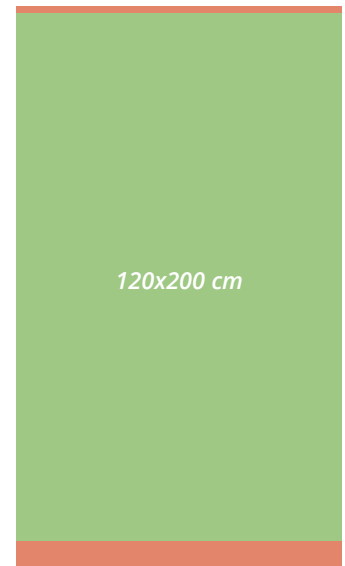

120x200 cm

+10 cm on bottom for slide into the mechanism



Visible surface of a rollup.



Surface will be hide in the mechanism and the bar of a rollup. It is appropriate to have continuing of roller's background on both surfaces (graphic motive).

Recommended resolution in reliance on viewer's distance from a rollup is 300>150 ppi.